For Residential and Commercial Applications				
Job Name	Engineer / Architect			
Job Location	Wholesaler			
Submittal Date	Contractor			

B8-**A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- Superior corrosion resistance to harsh chemicals found in common household cleaning and plumbing repair products
- More flexible than stainless steel, the braided polymer-coated fibers bend freely without kinking or crimping
- Tough inner core is reinforced to resist chlorine and chloramine leaching and deterioration
- Nitrile rubber washers provide a large pliable sealing surface and ensures a long lasting water tight connection
- 8-sided pneumatic crimp provides greater dependability for realible nut-to-hose connections
- 100% Compliant to California and Vermont "low-lead" requirements



Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F


Pressure: 125 psi maximum

Tubing Diameter: 0.450" I.D. (0.660" O.D.)

MATERIAL SPECIFICATIONS			
Inner Hose	Reinforced PVC		
Braiding	PVC coated polyester yarn		
Barb	Compliant brass		
Ferrule	Zinc plated 1008 steel		
Nut	C36000 brass		
Washer	Nitrile rubber		

Part Listing:

B8-9A F	1/2" F.I.P. x 1/2" F.I.P. x 9" length
B8-12A F	1/2" F.I.P. x 1/2" F.I.P. x 12" length
B8-16A F	1/2" F.I.P. x 1/2" F.I.P. x 16" length
B8-20A F	1/2" F.I.P. x 1/2" F.I.P. x 20" length
B8-24A F	1/2" F.I.P. x 1/2" F.I.P. x 24" length



B8-**A Speedi Plumb® PLUS Braided Faucet Connectors -


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.



Female Iron Pipe Inlet

Part Listing (con't):

B8-30A F	1/2" F.I.P. x 1/2" F.I.P. x 30" length
B8-36A F	1/2" F.I.P. x 1/2" F.I.P. x 36" length

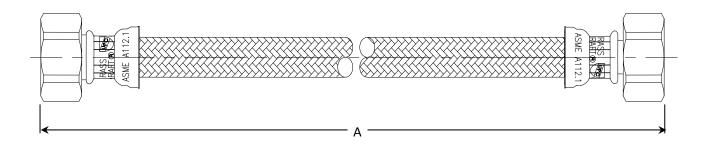

PART DIMENSIONS (Inches)		
Model	DIM. A	
B8-12A	12.0 / 13.0	
B8-16A	16.0 / 17.0	
B8-20A	20.0 / 21.0	
B8-24A	24.0 / 25.0	
B8-30A	30.0 / 31.0	
B8-36A	36.0 / 37.0	

Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- CSA approved to California Health & Safety Code & Vermont Bill S.152 (Project # 2174785)





